




**Technical Data Comparison Chart
NOVEMBER 2016**

	LOW INTENSITY	HIGH INTENSITY	GEN V LED	ANSER	DUAL ANSER
Wattage	2.4 Watt Incandescent	5 Watt Halogen	1.5 Watt LED Array	1.8 Watt LED	6 Watts (2 LEDs)
Draw @ 12V	230 mA	380 mA	150 mA	180 mA	480 mA
Light Output @ 12"	2.04 fc	22.02 fc	36.98 fc	73.95 fc	1474.2 fc (@ 6")
Color Temp (Kelvin)	N/A	3000K	4000K	3100K	3080K
CRI	N/A	N/A	85 Ra	90+ Ra	94 Ra
Average Life @ 12V	3000 Hours	2000 Hours	60,000 Hours	60,000 Hours	60,000 Hours

All test data subject to normal variances. Specifications subject to change without notice.

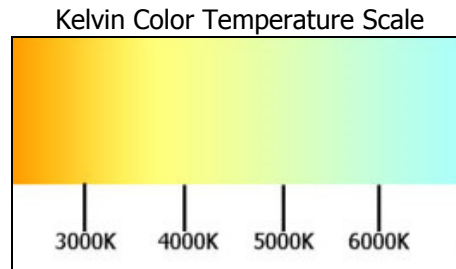

Power Supplies

GXF-10 Power Supply-(US Style)

Plug Type: A
Input: 100-240Vax 50/60 Hz, 1A
Output: 12Vdc/1A Max: 12W

EXF-10G Power Supply- (Euro Style)

Plug Type: C
Input: 100-240Vax 50/60 Hz, 1A
Output: 12Vdc/1A Max: 12W

Temperature: Operating 0 deg C to +40 deg C, storage -20 deg C to +85 deg C

Humidity: Operating and storage 5%-95% RH, non-condensing